



# KLS16c Specification

## 2-in-1 Video Controller



Version: v2.0

Release Date: June 2025

## Revision History

Serial Number	Summary of the revisions	Revision Date	Revised by
1	Initial release	2025/04/17	
2	Organize and update document format	2025/06/13	

## Safety Instructions

This chapter introduces the safety instructions for the 2-in-1 controller KLS16c to ensure the safety of product storage, transportation, installation and use.

Safety instructions apply to all persons who come into contact with and use the product.

First, please note the following points

- Please read all instructions.
- Please retain all instructions.
- Please follow all instructions.

Storage and transportation safety

- Please pay attention to dust and water protection.
- Please avoid prolonged direct sunlight.
- Keep away from heat and fire sources.
- Do not place in explosive gas environment.
- Do not place in a strong electromagnetic environment.
- Please place the product in a stable location to prevent it from falling and causing product damage or personal injury.
- Please save the box and packaging materials. They can be used when storing and transporting the product. For maximum protection of the device,
- Please repack the product in its original factory packaging.

Safe installation and use

- Only trained professionals can install the product.
- It is forbidden to plug or unplug while the power is on.
- Please ensure that the box is safely grounded.
- Please wear anti-static wrist guard and insulating gloves.
- Do not install the product in an environment with frequent or strong vibrations.
- Please dust regularly.
- Please do not repair the product without authorization. You can contact after-sales at any time.
- Please use the same product for spare parts replacement

## Overview

Kystar KLS16c two-in-one controller supports 8- channel digital signal input, has 16 network port outputs, and can load up to 10.4 million pixels. It adopts pure hardware FPGA architecture and can run continuously for 365 × 24 hours, meeting the configuration requirements of large-screen control systems for small-pitch applications.

## Certification Information

CQC

**If the product has no relevant certification in any country or region, please contact us immediately for confirmation or processing. Otherwise, if any legal risks are caused, the customer shall bear them by himself or our company shall have the right to seek compensation.**

## Features

- The single machine has 16 network ports, each port can load 650,000 pixels, and the whole machine can load a maximum of 10.4 million pixels. The width can reach 16360 points and the height can reach 10240 points.
- Supports multiple digital signal interfaces, including 4\*HDMI1.3 , 1\*HDMI2.0 and 1\*DP1.2 input sources.
- When the load height does not exceed 7680, it supports 8 -screen display ; when the load height exceeds 7680, it supports dual-screen display
- Supports arbitrary stringing of cables, and the empty areas are not counted into the network cable load, thus improving the utilization rate of network ports.
- Supports 3D function, which can be realized with 3D transmitter and 3D glasses. After enabling 3D function, the device load is halved.
- It supports self-output of test images such as pure color, gradient, scan line, etc., which is convenient for on-site debugging and testing.
- Supports optical port and network port switching to meet on-site wiring debugging requirements.
- Supports full-link audio accompaniment input and external audio input; and supports audio output.

- EDID configuration management: supports reading, modifying and customizing EDID (Extended Display Identification Data).
- Supports one-click black screen/still function.
- Black edge removal/cropping function: solve the black edge problem generated by the front-end signal, and perform arbitrary cropping for any signal source (still keep the full screen state)
- Support key lock to prevent accidental operation.
- The brightness and contrast of the overall output image can be adjusted in real time and quickly.
- Support adding 1 OSD layer to display slogans and other text information;

## Front and rear panel diagram



\*The product images in this article are for reference only. Please refer to the actual product purchased.

Name	Illustrate
Switch	Power switch of the device
LCD screen	Displays the current status and menu of the device.
Knobs	<ul style="list-style-type: none"> <li>• Press the knob to confirm the selection or enter the menu interface</li> <li>• Rotate the knob to select menu options or adjust parameters</li> </ul>
ESC key	<ul style="list-style-type: none"> <li>• ESC: Return button, used to return to the previous menu</li> </ul>
Function keys	<ul style="list-style-type: none"> <li>• MODE: Click to enter the mode switching interface</li> <li>• FUNC: Click to enter the common function interface</li> <li>• WIN: Click to enter the signal switching interface</li> <li>• OUT: Click to open a black screen, click again to return to normal</li> </ul>
Signal switch key	<ul style="list-style-type: none"> <li>• HDMI1: Click to switch HDMI1 signal</li> </ul>

- HDMI2: Click to switch HDMI2 signal
- HDMI3: Click to switch HDMI3 signal
- HDMI4: Click to switch HDMI4 signal
- DP(4K): Click to switch DP signal
- HDMI5(4K): Click to switch HDMI5 signal

Input source status light:

- Steady on: The input source signal is normal
- Flashing: No signal source is connected or the connected signal source is abnormal



\*The product images in this article are for reference only. Please refer to the actual product purchased.

Video Input Interface		
Interface	QTY	Illustrate
DP 1.2	1	<ul style="list-style-type: none"> <li>• Maximum support 3840*2160@60Hz or 7680*1080@60Hz</li> <li>• Support custom resolution: <ul style="list-style-type: none"> <li>– Custom maximum width: 7680</li> <li>– Custom maximum height: 7680</li> <li>– Custom maximum frame rate: 120Hz</li> </ul> </li> <li>• Support 8-bit video input</li> <li>• Supported color spaces/sampling rates: RGB 4:4:4/YCbCr 4:4:4/YCbCr 4:2:2</li> <li>• Supports HDCP 1.4</li> <li>• Supports accompanying audio</li> <li>• Does not support interlaced signal input</li> </ul>
HDMI2.0	1	<ul style="list-style-type: none"> <li>• Maximum support 3840*2160@60Hz or 7680*1080@60Hz</li> </ul>

		<ul style="list-style-type: none"> <li>• Compatible with HDMI1.4 and HDMI1.3 video input</li> <li>• Support custom resolution:               <ul style="list-style-type: none"> <li>– Custom maximum width: 7680</li> <li>– Custom maximum height: 7680</li> <li>– Custom maximum frame rate: 120Hz</li> </ul> </li> <li>• Support 8-bit video input</li> <li>• Supported color spaces/sampling rates: RGB 4:4:4/YCbCr 4:4:4/YCbCr 4:2:2</li> <li>• Supports HDCP 1.4</li> <li>• Supports accompanying audio</li> <li>• Does not support interlaced signal input</li> </ul>
HDMI 1.3	4	<ul style="list-style-type: none"> <li>• Support maximum input resolution : 2048*1152 @60Hz</li> <li>• Support custom resolution :               <ul style="list-style-type: none"> <li>– Custom maximum width: 2048 (2048 × 1152 @ 60Hz)</li> <li>– Custom maximum height: 4000 ( 462 × 4000 @60Hz)</li> </ul> </li> <li>• Supports 8-bit video input.</li> <li>• Supports HDCP 1.4.</li> <li>• Supported color spaces/sampling rates: RGB 4:4:4/YCbCr 4:4:4/YCbCr 4:2:2.</li> <li>• Supports accompanying audio input.</li> <li>• Interlaced signal input is not supported.</li> </ul>

## Video Output Interface


Interface	QTY	Illustrate
Network port	16	<ul style="list-style-type: none"> <li>• 16- channel Gigabit Ethernet output, capable of loading up to 10.4 million pixels.</li> <li>• Maximum width: 16360 , Maximum height: 10240</li> <li>• The maximum load of a single network port is: When the output bit depth is 8 bits, 650,000 pixels</li> </ul>
OPT	2	<ul style="list-style-type: none"> <li>• 2 10G optical port outputs, capable of carrying 13 million pixels.</li> <li>• OPT1 outputs the data of network ports 1-10, and OPT2 outputs the data of network ports 11-16</li> </ul>

## Audio Interface

Interface	QTY	Illustrate
-----------	-----	------------

Audio	2	1 × audio input interface, 1 × audio output interface <ul style="list-style-type: none"> <li>3.5mm standard audio input and output interface.</li> <li>The audio sampling rate supports 48kHz.</li> </ul>
<b>Control interface</b>		
Interface	QTY	Illustrate
COM	1	<ul style="list-style-type: none"> <li>RJ-45 interface, used to connect to the central control device</li> </ul>
USB -CFG	1	<ul style="list-style-type: none"> <li>USB-CFG interface, used to connect to PC and control the device using host computer software</li> </ul>
NET	1	<ul style="list-style-type: none"> <li>RJ45 interface, used to connect to the central control device</li> <li>The device can be controlled by connecting to the host computer software via a network cable</li> </ul>
3D	1	<ul style="list-style-type: none"> <li>Connect 3D transmitter to realize 3D function</li> </ul>

## Application Scenario

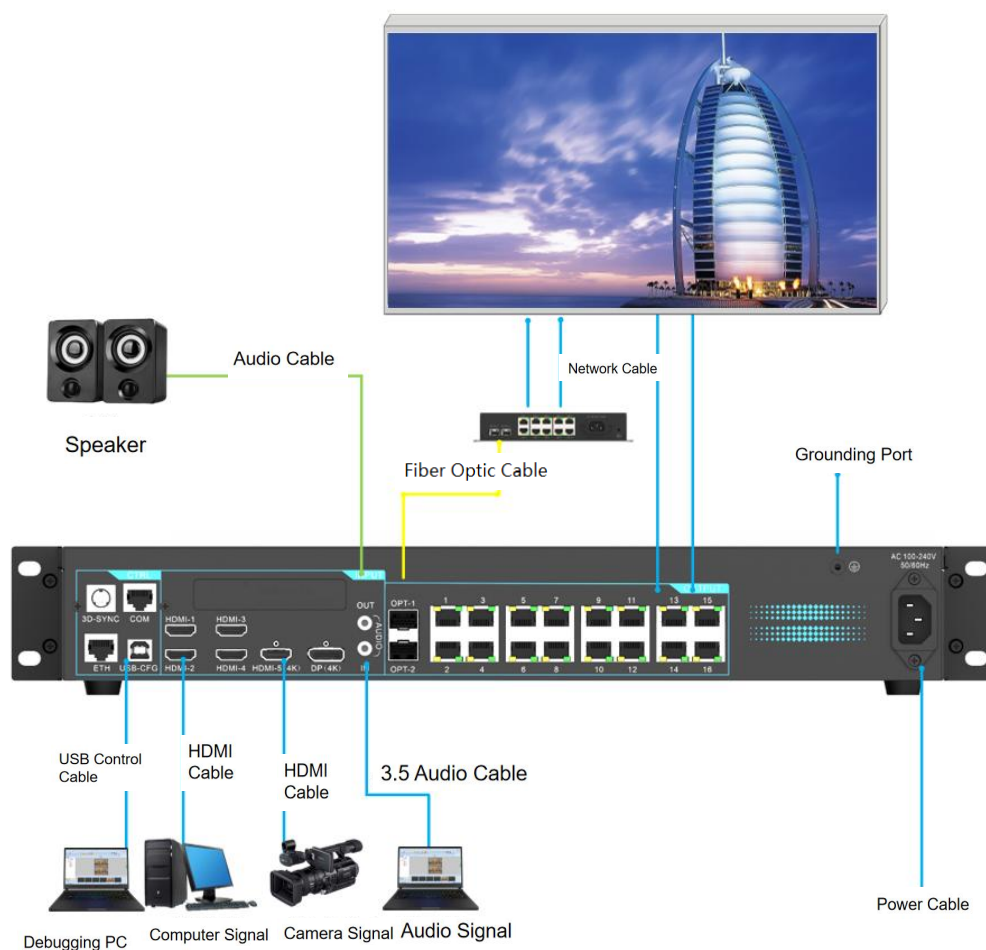




## Product Specifications

Machine Specifications		
Model		KLS16c
Electrical specifications	Power interface	100-240V~, 50/60Hz
	Maximum power consumption	102W
Work Environment	temperature	0°C ~ 50 °C
	humidity	0 %RH ~ 80 % RH, no condensation
Storage environment	temperature	-20 °C ~ +60 °C
	humidity	0 %RH ~ 95%RH, no condensation
Physical specifications	Product size	482.6mm × 375mm × 66mm
Packaging Information	Accessories	1×power cable, 1×HDMI cable, 1×USB cable, 1×certificate of conformity, 1×warranty card, 1× instruction manual
	net weight	5.1 kg
	gross weight	6.2 kg
	Outer box size	550 mm × 115 mm × 445 mm

## Product Size

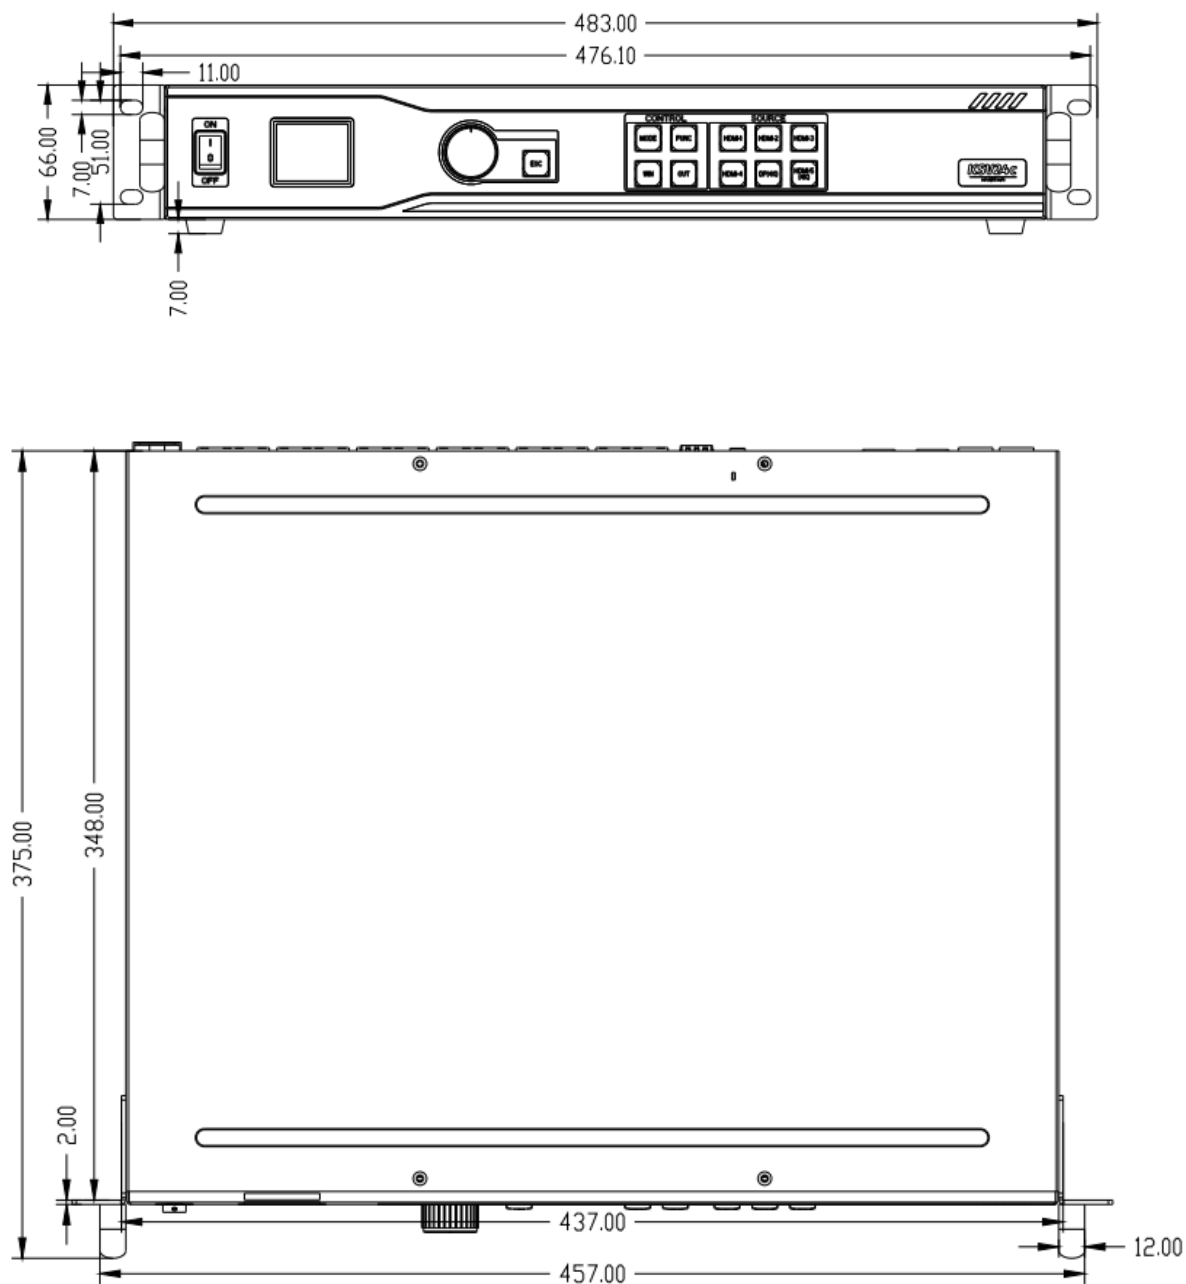


Unit: mm Unmarked linear and angular dimension tolerances comply with GB/T1804-M

## Copyright Notice

**Copyright © 2025 Beijing Kystar Technology Co., Ltd. All rights reserved.**

Without the written permission of our company, no organization or individual may excerpt or copy part or all of the contents of this document without authorization, and may not disseminate it in any form.

**Trademark Notice**  It is a registered trademark of Beijing Kystar.

### Statement

Welcome to choose the products of Beijing Kystar Technology Co., Ltd. We are very pleased if this document helps and facilitates you to understand and use the products. We strive to be accurate and reliable when writing documents, and may modify or change the content at any time without prior notice. If you encounter any problems during use, or have good suggestions, please contact us according to the contact information provided in the document. We will try our best to support you with the problems you encounter during use. We sincerely thank you for your suggestions and will evaluate and adopt them as soon as possible.



Beijing KystarTechnology Co., Ltd.

A professional provider of comprehensive solutions and operation services for ultra-high-definition video display and control.

Sales@kystar.net  
[www.kystar.com.cn/en](http://www.kystar.com.cn/en) | [www.kommander.com.cn/en](http://www.kommander.com.cn/en)